


PRODUCT SHEET / 2017 03 09

# LimbusCeiling Sub

Suspended absorbent

Design: Team Glimakra

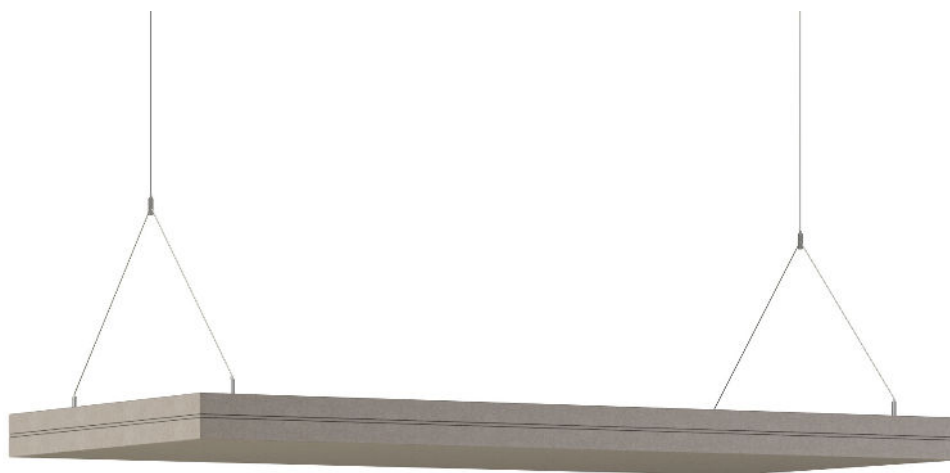


# LimbusCeiling Sub

Suspended absorbent

Design: Team Glimakra

LimbusCeiling Sub are ceiling-suspended absorbents to hang above or between workplaces. There are three different mounting options depending on the design of the workplace. LimbusCeiling Sub has very high sound absorbing and sound reducing properties.

## DIMENSIONS

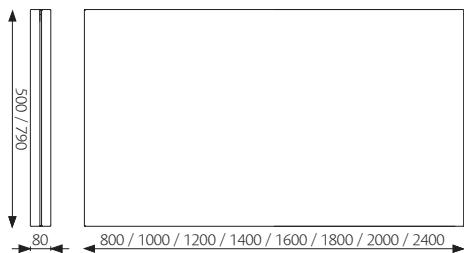

Other dimensions on request.

Weight [kg]:


Width [mm]:	500	790
Length 800 mm	3.0	4.0
Length 1000 mm	4.0	6.0
Length 1200 mm	5.5	8.0
Length 1400 mm	6.5	10.0
Length 1600 mm	7.0	11.0
Length 1800 mm	8.0	12.0
Length 2000 mm	8.5	13.0
Length 2400 mm	9.5	15.0

## DESCRIPTION

A wooden frame 80 x 30 mm, joined together with sharp corners and filled with an 80 mm solid sound absorbing polyether (Oeko-Tex).

Upholstery: Upholstered with fabric on both sides. The nails are covered with a decorative piping.

Suspension: Attached to the ceiling with an easily adjustable wire, 1.5 mm. Length 2 m.

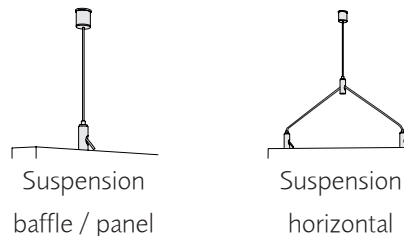


100% recyclable materials.

## OPTIONS

Fabric: Cara laminated, Hush, Stay, Blazer Lite, Blazer and Mainline Flax. Other fabrics on request.


Piping: 22 colours from Limbus piping selection map.



Baffle



Panel



Horizontal

# LimbusCeiling Sub

Suspended absorbent

Design: Team Glimakra

## CERTIFICATE

Acoustics: Measurements made in accordance with ISO 354:2003. Evaluation made according to standards for individual objects SS 25269:2013 (Report 14-186-M1, Date 2014-12-10, Akustikverkstan, laboratory accredited by Swedac)

Möbelfakta: The product meets the requirements for environment and social responsibility defined by Möbelfakta.

Glimakra of Sweden AB is certified according to ISO 9001:2008 and ISO 14001:2004.




## SPECIFICATION TEXT

E.g: LimbusCeiling SubBaffle 1600 x 500 x 40 mm.

80 mm sound absorbing filling. Sharp corners.

Fabric: Blazer CUZ 28. No visible seams. Nails hidden by piping black 190.

Acoustics evaluated according to SS 25269.

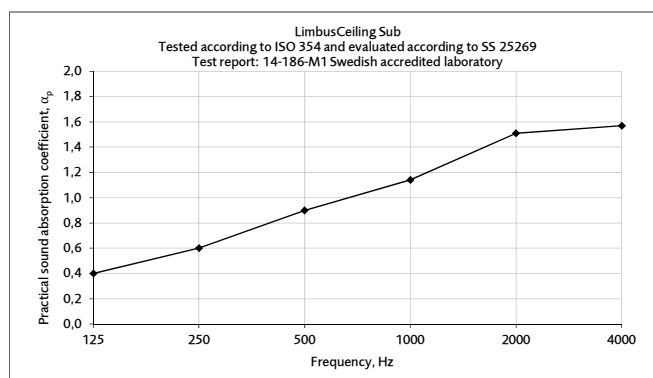

### Equivalent absorption area per m<sup>2</sup> panel surface (m<sup>2</sup>S/m<sup>2</sup>)

The values are to be multiplied by the panel area.

# LimbusCeiling Sub

Suspended absorbent

Design: Team Glimakra

