

PRODUCT SHEET / 2018 08 01

LimbusCeiling Soft

Suspended absorbent

Design: Team Glimakra




LimbusCeiling Soft

Suspended absorbent

Design: Team Glimakra

LimbusCeiling is ceiling-suspended absorbents to hang above or between workplaces. There are three different mounting options depending on the design of the workplace. LimbusCeiling Soft offers flexibility, high quality and a design that blends into most environments. Very popular in large projects.

DIMENSIONS

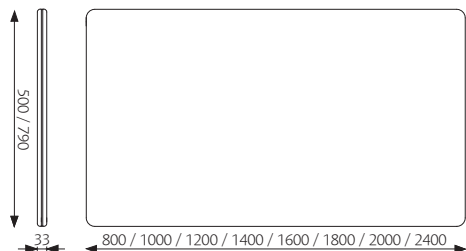

Other dimensions on request.

Weight [kg]:


| | | |
|----------------|------|------|
| Length 800 mm | 4.6 | 7.3 |
| Length 1000 mm | 5.8 | 9.1 |
| Length 1200 mm | 6.9 | 10.9 |
| Length 1400 mm | 8.1 | 12.7 |
| Length 1600 mm | 9.2 | 14.5 |
| Length 1800 mm | 10.4 | 16.4 |
| Length 2000 mm | 11.5 | 18.1 |
| Length 2400 mm | 13.8 | 21.8 |

DESCRIPTION

Body: 31 mm acoustic board consisting of sound absorbing polyether (Oeko-Tex) glued on both sides of an 19 mm sound reducing lightweight MDF.

Upholstery: Upholstered with fabric on both sides. The nails are covered with a decorative piping.

Suspension: Attached to the ceiling with an easily adjustable wire, 1.5 mm. Length 2 m.

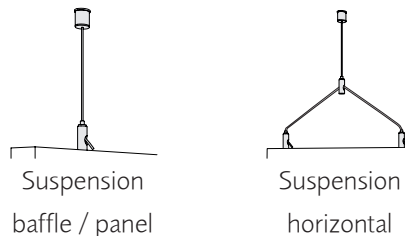

100% recyclable materials.

FABRIC AND PIPING


Look in Product sheet Fabric and piping.pdf for our standard fabrics, you can download it here: <http://glimakra.com/en/download/>.



Baffle



Panel



Horizontal

LimbusCeiling Soft

Suspended absorbent

Design: Team Glimakra

CERTIFICATE

Acoustics: Measurements made in accordance with ISO 354:2003. Evaluation made according to standards for individual objects SS 25269:2013 (Report 13-187-M3, Date 2013-12-17, WSP Akustik, laboratory accredited by Swedac)

Möbelfakta: The product has been declared and approved in accordance with the criteria for floor screens in Möbelfakta ver. 2015-05-01. Reg. No: 0220180626.

Valid until 2023-06-26.

Glimakra of Sweden AB is certified according to ISO 9001:2015 and ISO 14001:2015.




SPECIFICATION TEXT

E.g: LimbusCeiling Soft Baffle 1600 x 500 x 33 mm.

Sound absorbing filling on both sides of an 19 mm sound reducing light weight MDF.

Fabric: Blazer CUZ 28. No visible seams. Nails hidden by piping black 190.

Acoustics evaluated according to SS 25269.

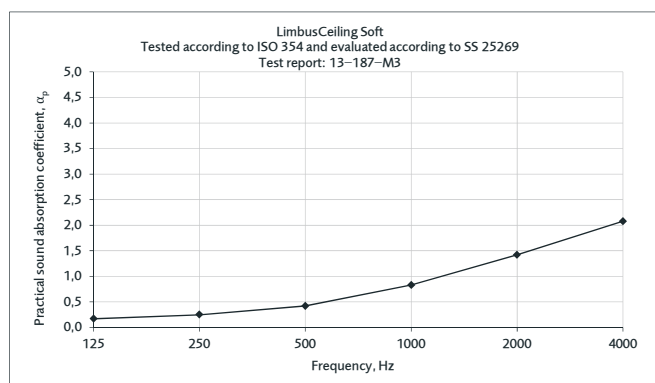

Equivalent absorption area per m² panel surface (m²S/m²)

The values are to be multiplied by the panel area.

PRODUCT SHEET / 2018 08 01

LimbusCeiling Soft

Suspended absorbent

Design: Team Glimakra

