

PRODUCT SHEET / 2020 11 19

LimbusFloor

Floor screen

Design: Team Glimakra




LimbusFloor

Floor screen

Design: Team Glimakra

LimbusFloor is based on the original version with 40 mm fabric-covered screen with straight lines, sharp edges and a decorative piping around the screen. The floor screen has a perfect balance between sound absorption and sound propagation that is achieved with a sound reducing body and a sound absorbing polyether on both sides. The flexibility in size and fabric selection allows the screens to be customized to most environments.

DIMENSIONS

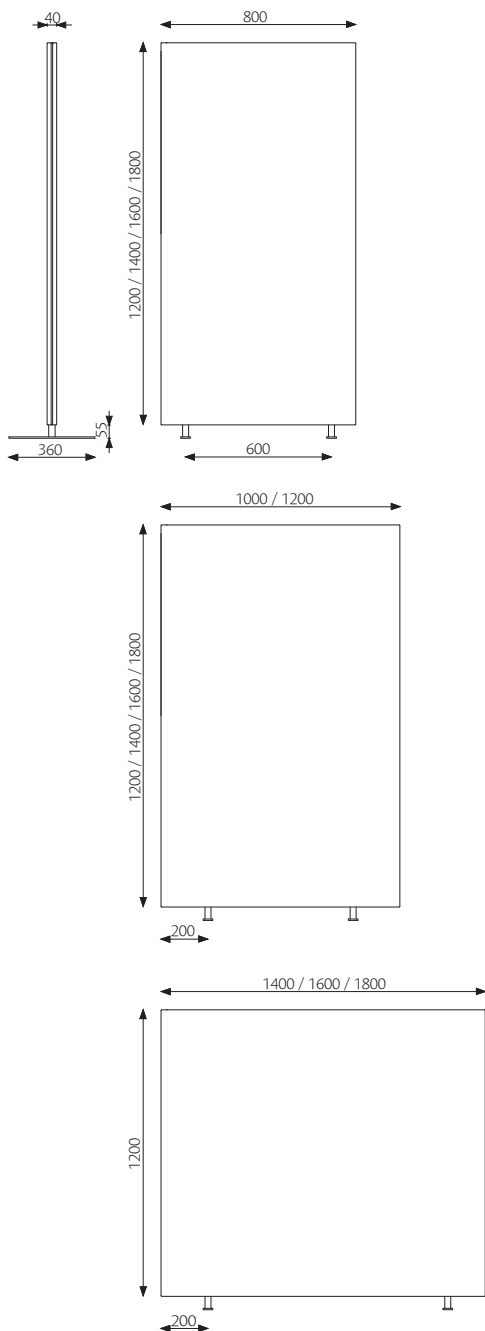

Other dimensions on request.

Thickness: 40 mm

Weight: 19 kg/m²

DESCRIPTION

Body: 15 mm sound absorbing polyether (Oeko-Tex) glued on both sides of an 8 mm sound reducing MDF board (Nordic Ecolabel) with a 40 mm frame.

Upholstery: Upholstered with fabric on both sides. The nails are covered with a decorative piping.

Foot: Powder coated grey 360 x 40 x 6 mm.

Total height leg with foot: 55 mm.

Installation: The feet are mounted with an allen key.

100% recyclable materials.

FABRIC AND PIPING

Look in Product sheet Fabric and piping.pdf for our standard fabrics, you can download it here: <http://glimakra.com/en/download/>.

LimbusFloor

Floor screen


Design: Team Glimakra



OPTIONS

More information in separate product sheet.


Foot: Straight foot and angular foot on lockable castors. Grey as standard, black and white on request.



Straight foot
h 55 mm

Angular foot
on lockable
castors
h 120 mm

Top fitting:

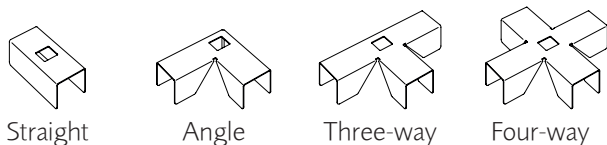


Straight


Angle

Three-way


Four-way



RoundedCorners: Connected with rounded corner.



Addon: Dimensioned add on screen in acrylic plastic. More information in separate product sheet.



Writingboard: 650 x 970 mm, writing laminate.

CERTIFICATES

Acoustics: Measurements made in accordance with ISO 354:2003. Evaluation made according to standards for individual objects SS 25269:2013 (Report 10171560.03, Date 2012-01-30, WSP Akustik, laboratory accredited by Swedac)

Möbelfakta: The product has been declared and approved in accordance with the criteria for floor screens in Möbelfakta ver. 2015-05-01. Reg. No: 0220151216. Valid until 2020-12-16.



Glimakra of Sweden AB is certified according to ISO 9001:2015 and ISO 14001:2015.




SPECIFICATION TEXT

E.g: LimbusFloor floor screen 1600 x 1200 x 40 mm with feet with hidden attachment in screen.

2 x 15 mm sound absorbing polyether on both sides of an 8 mm sound reducing MDF board. Sharp corners.

Fabric: Blazer CUZ 28 on the inside and Blazer CUZ 30 on the outside. No visible seams. Nails hidden by piping black 190.

Acoustics evaluated according to SS 25269.

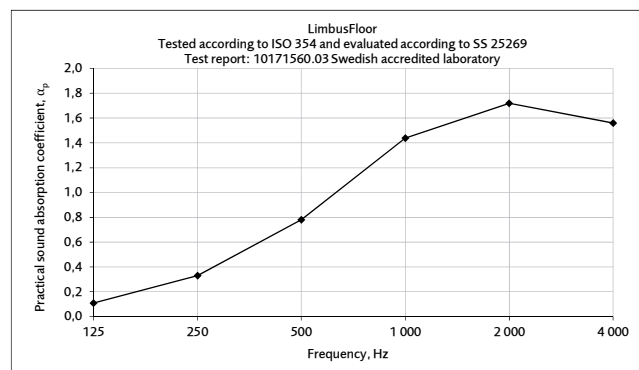

Equivalent absorption area per m² screen surface (m²S/m²)

The values are to be multiplied by the screen area.

LimbusFloor

Floor screen

Design: Team Glimakra

