

PRODUCT SHEET / 2017 07 06

Limbus Reception Lodge

Reception desk

Design: Joel Karlsson, Krook & Tjäder Design



LimbusReception Lodge

Reception desk

Design: Joel Karlsson, Krook & Tjäder Design


LimbusReception Lodge is a system of modular designed reception desks. The design is well suited to the requirements of modern entrances and other meeting places. The base unit can be provided with fabric-covered sound absorbing walls and ceiling for a better acoustic environment while creating an often desirable privacy. The surface consists of extremely matt nanotech surface that accentuates a soft impression. Minor scratches are easily repaired with thermal heat treatment. Dimmable LED lighting in the ceiling, toe kick and inside of the desk, controlled by a triple switch. The reception desk has an electric height adjustable table top that can be fitted with power frame and cable trays. On the outside, the visitors encounter a fabric-covered shelf, garment hook and USB chargers. This, together with the ceiling gives the desk its unique character.

DIMENSIONS

Widths:	1200 / 1600 / 2000 / 2400 mm
Depth:	970 mm
Height with ceiling:	2150 mm
Height without ceiling:	1100 mm
Screen thickness:	40 mm


DESCRIPTION

Lodge Basic (base unit):



Reception desk incl. electric height adjustable tabletop, USB chargers and lighting on the inside of the desk and toe kick. On the outside a fabric-covered shelf and garment hook for e.g. jacket, hanger and garment cover.

Lodge Acoustic:



Lodge Basic as described above provided with a ceiling with integrated dimmable LED lighting.

Lodge is a modular system that can be connected into long units.

DESCRIPTION CONT.

Desk- and tabletop: Fenix NTM, matt nanotech surface.

Ceiling: 15 mm sound absorbing polyether (Oeko-Tex) glued on both sides of an 8 mm sound reducing MDF board (Nordic Ecolabel) with a 40 mm frame.

Upholstery: Upholstered with nailed fabric on both sides. The nails are covered with piping on the inside.

Upholstered shelf: 400 x 200 x 40 mm MDF (Nordic Ecolabel)

Upholstered hook: Ø155 x 40 mm MDF (Nordic Ecolabel)

Cable tray: Tabletop provided with LiftPipe cable tray.

USB: Double USB charger, 12V integrated in the desktop.

Integrated power frame: The tabletop is fitted with a power frame with 2 power and 2 data.

Electric stand: Linak lifting columns integrated in the sides.

Lighting toe kick/desk: Integrated LED strip.

Power 4.8 W/m, 12 W, 3000 K. Brightness 120 lm/m.

Lighting ceiling: LED strip in an integrated aluminum rail.

Power 19.2 W/m, 24 W, 3000 K Brightness 1000 lm/m.

Beam angle 120°.

LimbusReception Lodge

Reception desk

Design: Joel Karlsson, Krook & Tjäder Design


OPTIONS

Surface: Fenix NTM, matt nanotech surface.

0032 Bianco Kos, NCS S 0500-N white

0718 Grigio Londra, NCS S 5502-Y grey

0032 white



NCS S 0500-N

0718 grey



NCS S 5502-Y

Colours, printed or displayed on screen, are displayed as a guide and colour variations may occur. We advise you request actual samples before ordering.

Fabrics: Blazer, Mainline Flax and Synergy. Other fabrics on request.

Piping: 22 colours from Limbus piping selection map.

CERTIFICATE

Glimakra of Sweden AB is certified according to ISO 9001:2008 and ISO 14001:2004.



SPECIFICATION TEXT

Ex: Glimakra LimbusReception Lodge Acoustic reception desk
2400 x 970 x 2150 mm.

Surface: Fenix NTM, matt nanotech surface,
colour 0718 grey

Ceiling with 2 x 15 mm sound absorbing polyether on both
sides of an 8 mm sound reducing MDF board.





Fabric: Blazer CUZ 1Q.

Piping: grey 484.


LimbusReception Lodge

Reception desk

Design: Joel Karlsson, Krook & Tjäder Design

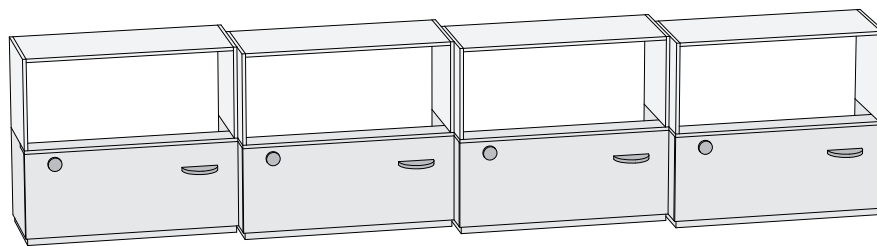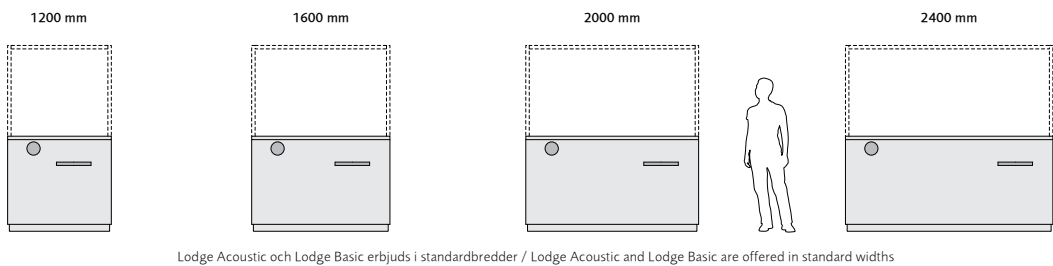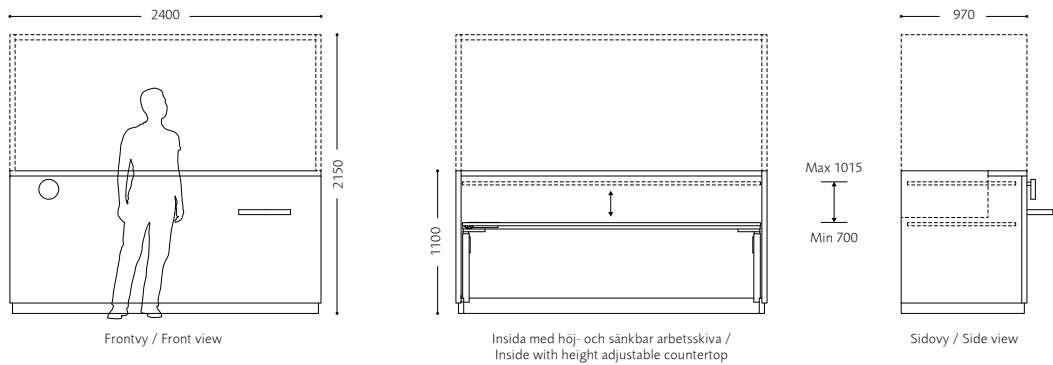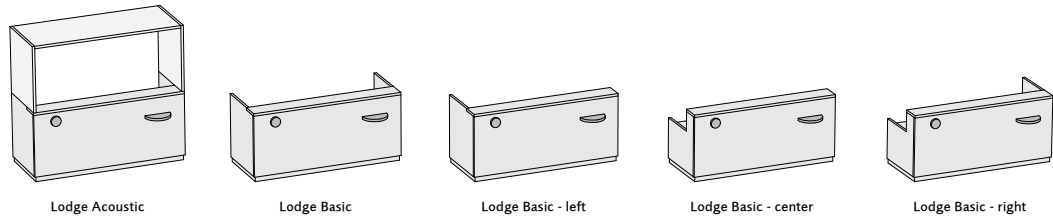

Lodge Acoustic, förskjuten upprepning / Lodge Acoustic, offset repetition

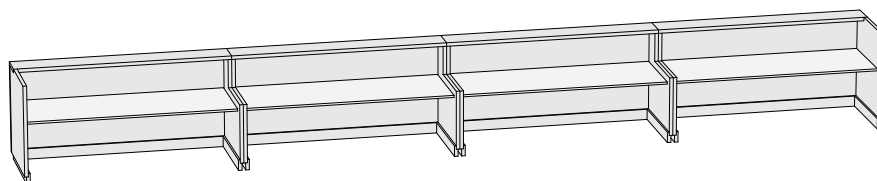

Lodge Basic (left, center, right), linjär upprepning / Lodge Basic (left, center, right), linear repetition

Limbus Reception Lodge

Reception desk

Design: Joel Karlsson, Krook & Tjäder Design

