


PRODUCT SHEET / 2018 04 06

# LimbusLighting Horizontal

Suspended lighting with sound absorption

Design: Team Glimakra

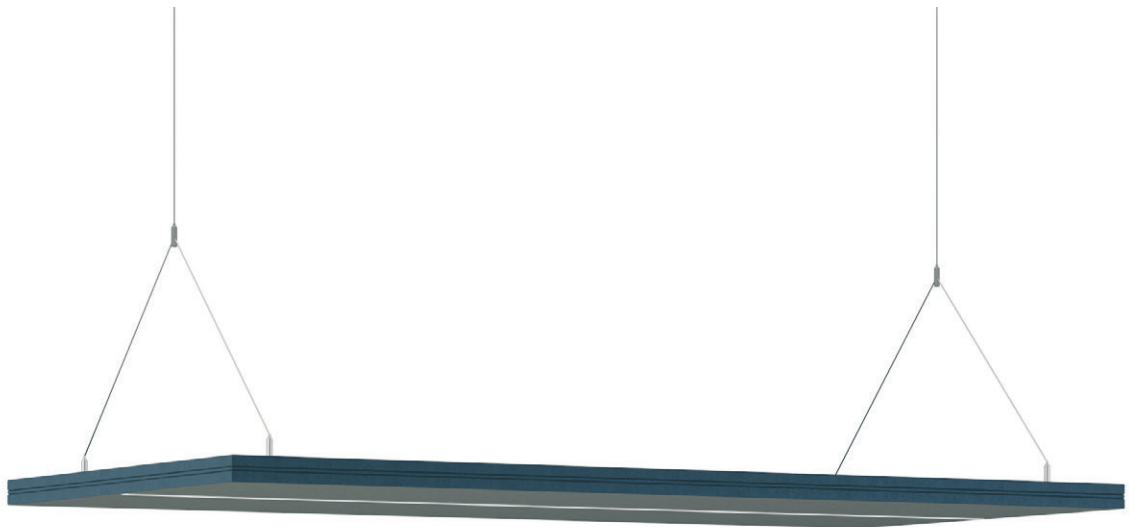


# LimbusLighting Horizontal

Suspended lighting with sound absorption

Design: Team Glimakra

LimbusLighting Horizontal is a ceiling-suspended absorbent with lighting to hang above or between workplaces. LimbusLighting Horizontal has the same sound absorbing and sound reducing properties as LimbusLighting Horizontal.

## DIMENSIONS

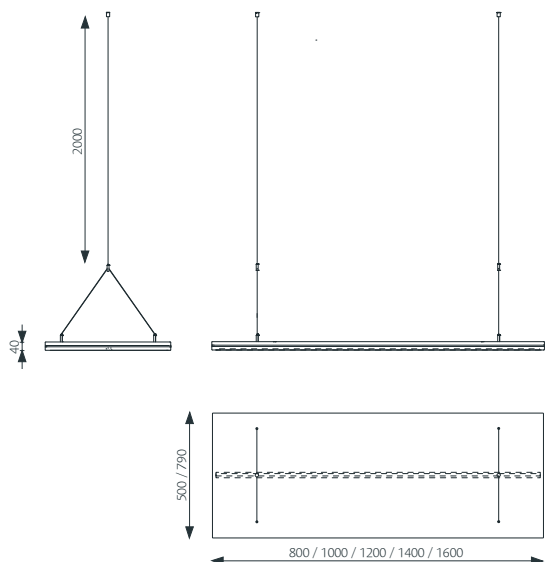

Other dimensions on request.

### LimbusLighting Horizontal 25

Weight [kg]:

Length [mm]:	800	1000	1200	1400	1600
Width 500 mm	5.5	7.0	7.8	9.4	10.9
Width 790 mm	8.6	11.1	12.3	14.8	17.3

### LimbusLighting Horizontal 40

Weight [kg]:

Length [mm]:	1200
Width 500 mm	7.8


## DESCRIPTION

Body: 15 mm sound absorbing polyether (Oeko-Tex) glued on both sides of an 8 mm sound reducing MDF board (Nordic Ecolabel) with a 40 mm frame.

Upholstery: Upholstered with fabric on both sides. The nails are covered with a decorative piping.

Suspension: Attached to the ceiling with an easily adjustable wire, 1.5 mm. Length 2 m.

Recommended mounting height: 2 m above the floor



Light source: Dimmable LED strip in aluminum rail. Can be connected to an external dimmer. Installation of dimmer must be performed by a qualified electrician.

Horizontal 25: 1180 lm/m, effect: 19.2 W/m

Horizontal 40: 1758 lm/m, effect: 14.2 W/m Premium

Beam angle: 120°

Correlated colour temperature (CCT): 3000 K

Optics: White, polycarbonate reflectors.

Power supply: Driver 24 V, placed on top of the panel.

Cable: 2 m, with European plug

## FABRIC AND PIPING

Look in Product sheet Fabric and piping.pdf for our standard fabrics, you can download it here: <http://glimakra.com/en/download/>

# LimbusLighting Horizontal

Suspended lighting with sound absorption

Design: Team Glimakra

## CERTIFICATE

Acoustics: Measurements made in accordance with ISO 354:2003. Evaluation made according to standards for individual objects SS 25269:2013 (Report 10171560.03, Date 2012-01-30, WSP Akustik, laboratory accredited by Swedac)

Möbelfakta: The product has been declared and approved in accordance with the criteria for floor screens in Möbelfakta ver. 2015-05-01. Reg. No: 0420151216. Valid until 2020-12-16.

Glimakra of Sweden AB is certified according to ISO 9001:2015 and ISO 14001:2015.



## SPECIFICATION TEXT

E.g: Glimakra LimbusLighting Horizontal 25, 1180 lm/m  
1600 x 500 x 40 mm.

2 x 15 mm sound absorbing polyether on both sides of an 8 mm sound reducing MDF board. Sharp corners.

Fabric: Blazer CUZ 28. No visible seams. Nails hidden by piping black 190.

Acoustics evaluated according to SS 25269.

Integrated LED strip 19.2 W/m, 24 V.


E.g: Glimakra LimbusLighting Horizontal 40, 1758 lm/m  
1200 x 500 x 40 mm.

2 x 15 mm sound absorbing polyether on both sides of an 8 mm sound reducing MDF board. Sharp corners.

Fabric: Blazer CUZ 28. No visible seams. Nails hidden by piping black 190.

Acoustics evaluated according to SS 25269.

Integrated LED strip 19.2 W/m, 24 V Premuim.

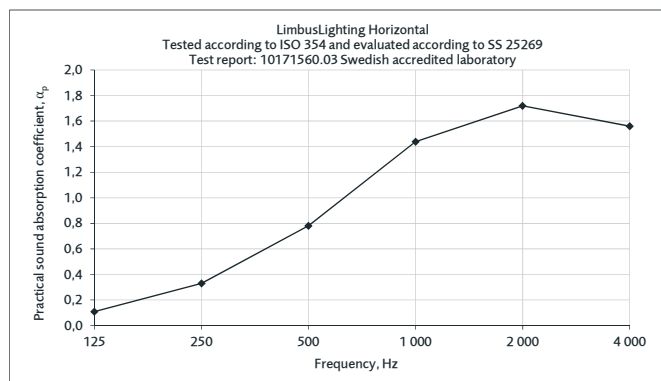

### Equivalent absorption area per m<sup>2</sup> panel surface (m<sup>2</sup>S/m<sup>2</sup>)

The values are to be multiplied by the panel area.

# LimbusLighting Horizontal

Suspended lighting with sound absorption

Design: Team Glimakra

