

Weave

Pendant with absorption

Design: Lukas Dahlén




Weave

Pendant with absorption

Design: Lukas Dahlén

Weave is like a onepiece in the open offices, in the conference room, several hanging from a high ceiling of the hotel lobby or over the coffee table at work. Birch and recycled PET bottles are intertwined through traditional craftsmanship and modern technology to a mood lighting fixture that contribute to a good acoustic environment. Weave is equipped with the modern LED technology which provides a high light output and colour rendering, while the lighting is energy efficient with very long life.

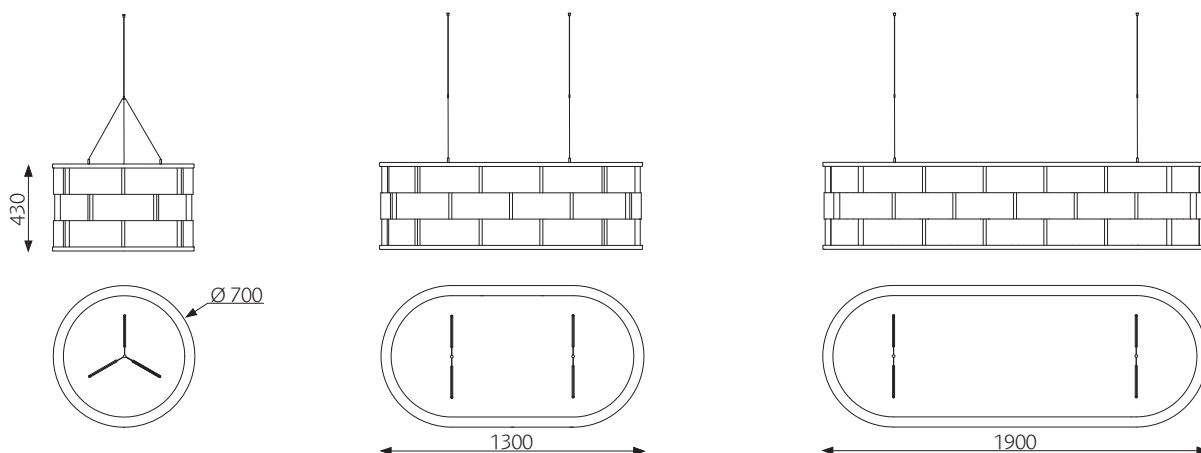


DIMENSIONS

Weight: 8 / 16 / 24 kg

DESCRIPTION

Body: Two oval birch frames 50 x 20 mm assembled with vertical birch strips 390 x 28 x 15 mm. White recyclable molded polyester felt intertwine in 3 levels between the ribs. LED lighting mounted on horizontal wooden laths for both up and down light. The lamp has 3 mm diffusing lens hood in acrylic which spreads light in a pleasant way both at the top and bottom edge. Weave is delivered fully assembled and connected with an European plug to a standard socket 220 V. Suspension: Attached to the ceiling with an easily adjustable wire, 1.5 mm. Length 2 m.



Weave 700

Light source: 3pcs (2 down 1 up) LLE G4 24x280 mm 1250lm 830 4T ADV

Driver 1st LCA 25W 350-1050mA one4all SC PRE (Tridonic)

Resistor: 1st I-SEL 2 PLUG 950MA BL

Weave 1300

Light source: 3pcs (2 down 1 up) LLE G4 24x560 mm 2400lm 830 4T ADV

Driver: 1st LCA 60W 900-1750mA one4all SR PRE

Resistor: 1st I-SELECT 2 PLUG 1000MA BL

Weave 1900

Light source (LED list): 5pcs (3 down 2 up) LLE G4 24x560 mm 2400lm 830 4T ADV

Driver: 1st LCA 100W 1100-2100mA one4all SR PRE

Resistor: 1st I-SEL 2 PLUG 1600MA BL

White power cable with European connector (3 m)

SAFETY

Repair and maintenance of the LED module must be performed by a qualified electrician.

When cleaning is required, use only water together with mild soap on the outside of the lens. Cleaning inside of the LED module is strictly prohibited.

CERTIFICATE

Glimakra of Sweden AB is certified according to ISO 9001:2015 and ISO 14001:2015.



SPECIFICATION TEXT

E.g: Glimakra Weave pendant with absorption 1900 x 700 mm.

Weave

Pendant with absorption

Design: Lukas Dahlén

