

Limbus Soft

Suspended absorbent

Design: Team Glimakra



GLIMAKRA
OF SWEDEN




Limbus Soft

Suspended absorbent

Design: Team Glimakra

LimbusCeiling is ceiling-suspended absorbents to hang above or between workplaces. There are three different mounting options depending on the design of the workplace. LimbusCeiling Soft offers flexibility, high quality and a design that blends into most environments. Very popular in large projects.

DIMENSIONS

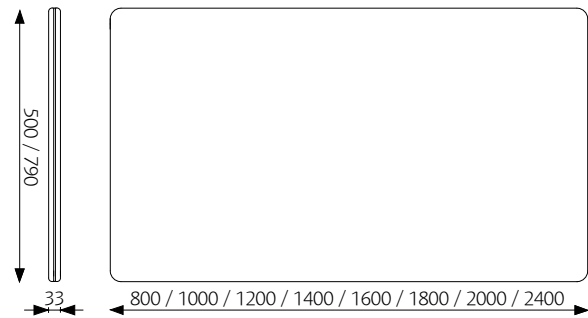

Other dimensions on request.

Weight [kg]:

Width [mm]:	500	790
Length 800 mm	4.6	7.3
Length 1000 mm	5.8	9.1
Length 1200 mm	6.9	10.9
Length 1400 mm	8.1	12.7
Length 1600 mm	9.2	14.5
Length 1800 mm	10.4	16.4
Length 2000 mm	11.5	18.1
Length 2400 mm	13.8	21.8


DESCRIPTION

Body: 31 mm acoustic board consisting of sound absorbing polyether (Oeko-Tex) glued on both sides of an 19 mm sound reducing lightweight MDF.


Upholstery: Upholstered with fabric on both sides.

The nails are covered with a decorative piping.

Suspension: Attached to the ceiling with an easily adjustable wire, 1.5 mm. Length 2 m.



Suspension
baffle / panel



Suspension
horizontal

100% recyclable materials.


FABRIC AND PIPING

Look in Product sheet Fabric and piping.pdf for our standard fabrics, you can download it here:


<http://glimakra.com/en/download/>.



Baffle



Panel



Horizontal

Limbus Soft

Suspended absorbent


Design: Team Glimakra



GLIMAKRA
OF SWEDEN

CERTIFICATE

Acoustics: Measurements made in accordance with ISO 354:2003. Evaluation made according to standards for individual objects SS 25269:2013 (Report 13-187-M3, Date 2013-12-17, WSP Akustik, laboratory accredited by Swedac)

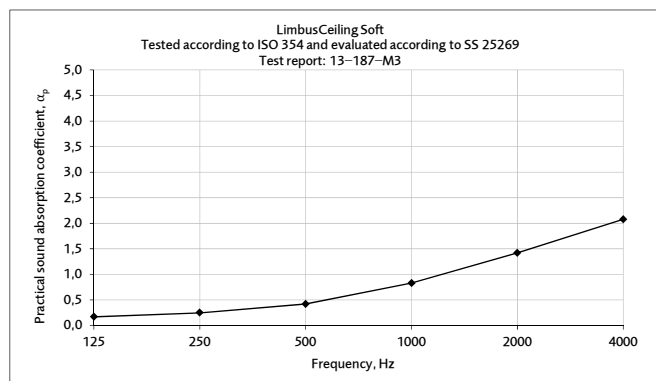

Equivalent absorption area per m² panel surface (m²S/m²)

The values are to be multiplied by the panel area.

Möbelfakta: The product has been declared and approved in accordance with the criteria in Möbelfakta 2023-04-01 ver. 15. Reg. No: 220180626. Valid until 2028-06-26.



Glimakra of Sweden AB is certified according to ISO 9001:2015 and ISO 14001:2015.



SPECIFICATION TEXT

E.g: LimbusCeiling Soft Baffle 1600 x 500 x 33 mm.

Sound absorbing filling on both sides of an 19 mm sound reducing light weight MDF.

Fabric: Blazer CUZ 28. No visible seams.

Nails hidden by piping black 190.

Acoustics evaluated according to SS 25269.

Limbus Soft

Suspended absorbent

Design: Team Glimakra



GLIMAKRA
OF SWEDEN

