

# Limbus Sub

Suspended absorbent

Design: Team Glimakra



GLIMAKRA  
OF SWEDEN



# Limbus Sub

Suspended absorbent


Design: Team Glimakra



GLIMAKRA  
OF SWEDEN

Limbus Sub are ceiling-suspended absorbents to hang above or between workplaces. There are three different mounting options depending on the design of the workplace. Limbus Sub has very high sound absorbing and sound reducing properties.

## DIMENSIONS

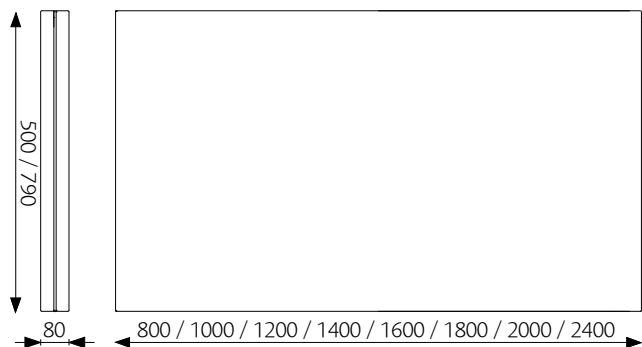

Other dimensions on request.

Weight [kg]:

Width [mm]:	500	790
Length 800 mm	3.0	4.0
Length 1000 mm	4.0	6.0
Length 1200 mm	5.5	8.0
Length 1400 mm	6.5	10.0
Length 1600 mm	7.0	11.0
Length 1800 mm	8.0	12.0
Length 2000 mm	8.5	13.0
Length 2400 mm	9.5	15.0

## DESCRIPTION

A wooden frame 80 x 30 mm, joined together with sharp corners and filled with an 80 mm solid sound absorbing polyether (Oeko-Tex).

**Upholstery:** Upholstered with fabric on both sides.

The nails are covered with a decorative piping.

**Suspension:** Attached to the ceiling with an easily adjustable wire, 1.5 mm. Length 2 m.



Suspension  
baffle / panel


Suspension  
horizontal

100% recyclable materials.


## FABRIC AND PIPING

Look in Product sheet Fabric and piping.pdf for our standard fabrics, you can download it here:


<http://glimakra.com/en/download/>.



Baffle



Panel



Horizontal

# Limbus Sub


## Suspended absorbent

Design: Team Glimakra



### CERTIFICATE

**Acoustics:** Measurements made in accordance with ISO 354:2003. Evaluation made according to standards for individual objects SS 25269:2013 (Report 14-186-M1, Date 2014-12-10, Akustikverkstan, laboratory accredited by Swedac)

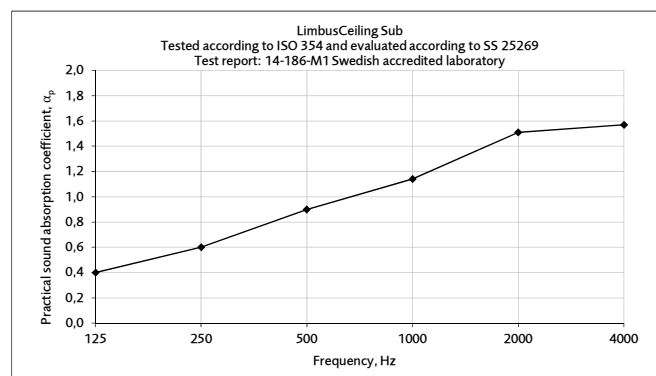

### Equivalent absorption area per m<sup>2</sup> panel surface (m<sup>2</sup>S/m<sup>2</sup>)

The values are to be multiplied by the panel area.

**Möbelfakta:** The product has been declared and approved in accordance with the criteria in Möbelfakta 2023-04-01 ver. 15.

Reg. No: 220180626. Valid until 2028-06-26.



Glimakra of Sweden AB is certified according to ISO 9001:2015 and ISO 14001:2015.



### SPECIFICATION TEXT

E.g: Limbus Sub Baffle 1600 x 500 x 40 mm.

80 mm sound absorbing filling. Sharp corners.

Fabric: Blazer CUZ 28. No visible seams.

Nails hidden by piping black 190.

Acoustics evaluated according to SS 25269.

# Limbus Sub

Suspended absorbent

Design: Team Glimakra



GLIMAKRA  
OF SWEDEN

