


PRODUCT SHEET / 2023 11 22

# Limbus Soft

Floor screen

Design: Team Glimakra

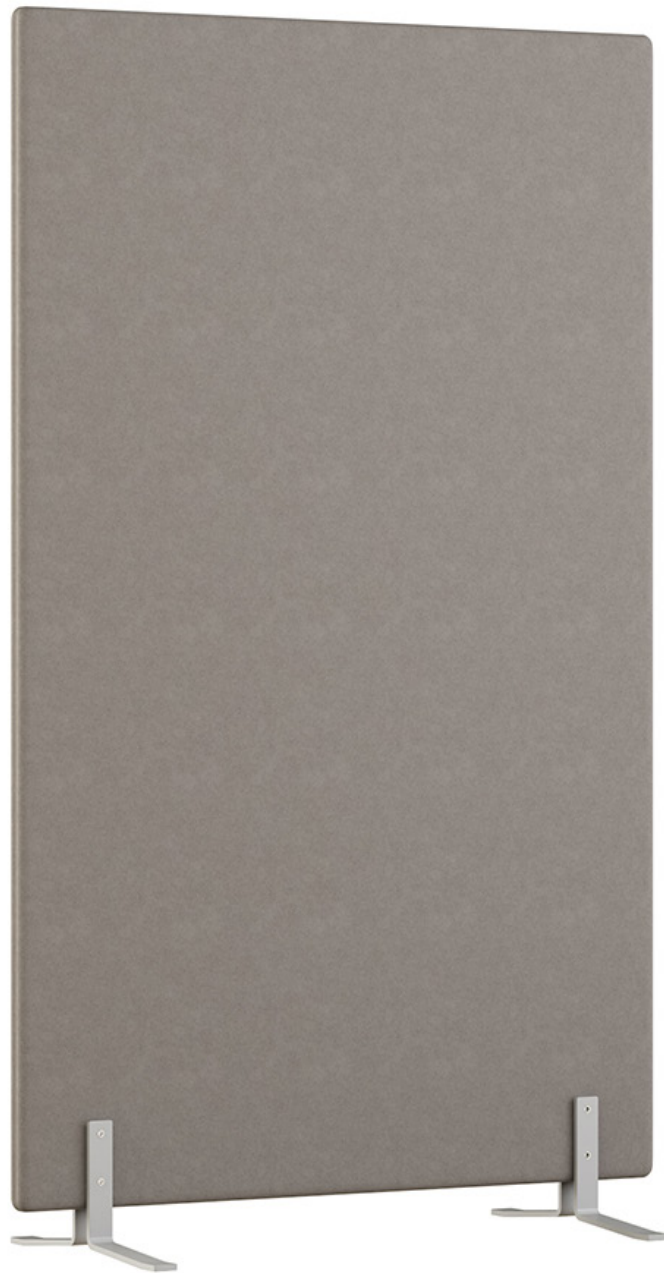


# Limbus Soft

## Floor screen

Design: Team Glimakra

Limbus Soft Floor screen focuses on reducing sound propagation in combination with good sound absorption. Reducing the sound propagation between workplaces is often the most important feature of floor screens and desk-up screens. Limbus Soft offers flexibility, high quality and a design that blends into most environments. Very popular in really large projects.

### DIMENSIONS

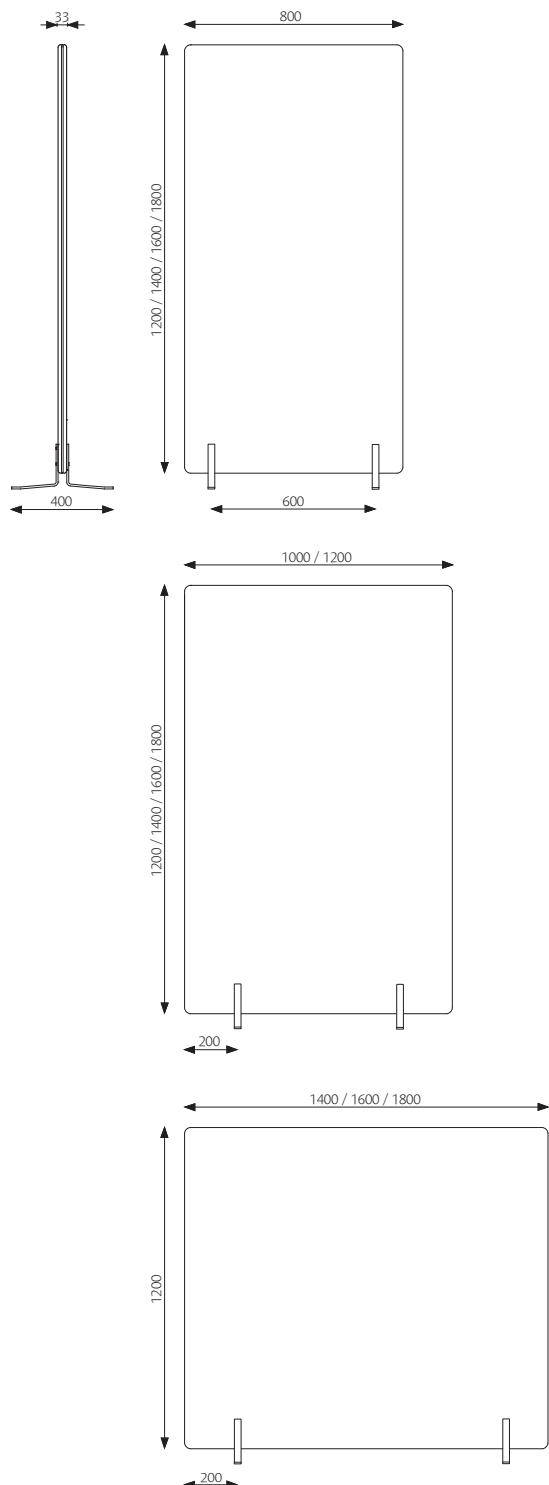

Other dimensions on request.

Thickness: 33 mm

Weight: 16 kg/m<sup>2</sup>

### DESCRIPTION

Body: 31 mm acoustic board consisting of sound absorbing polyether (Oeko-Tex) glued on both sides of an 19 mm sound reducing lightweight MDF.

Upholstery: Upholstered with fabric on both sides. The nails are covered with a decorative piping.

Angular foot (pair): Powder coated grey 400 x 35 x 8 mm.

Total height leg with foot: about 62 mm.

Installation: The feet are mounted with continuous stud bolt (M6).

100% recyclable materials.

### FABRIC AND PIPING

Look in Product sheet Fabric and piping.pdf for our standard fabrics, you can download it here: <http://glimakra.com/en/download/>.

# Limbus Soft

Floor screen


Design: Team Glimakra




## OPTIONS

More information in separate product sheet.

Foot: Angular foot, angular foot on lockable castors and single leg. Grey as standard, black and white on request.



Angular foot  
h 62 mm



Angular foot  
on lockable  
castors  
h 120 mm




Single leg  
h 62 mm


Top fitting:




Straight




Angle




Three-way



Four-way



Addon: Dimensioned add on screen in acrylic plastic. More information in separate product sheet.



Writingboard: 650 x 970 mm, writing laminate.

## CERTIFICATES

Acoustics: Measurements made in accordance with ISO 354:2003. Evaluation made according to standards for individual objects SS 25269:2013 (Report 13-187-M3, Date 2013-12-17, Akustikverkstan, laboratory accredited by Swedac)

Möbelfakta: This product has been declared and approved according to the criteria of Möbelfakta ver. 2019-05-01. Reg. number 0120150605. Validity: until 2025-06-05.



Glimakra of Sweden AB is certified according to ISO 9001:2015 and ISO 14001:2015.




## SPECIFICATION TEXT

E.g: Limbus Soft Floor screen 1600 x 1200 x 33 mm with two pair angular feet.

Sound absorbing filling on both sides of an 19 mm sound reducing light weight MDF.

Fabric: Blazer CUZ 28 on the inside and Blazer CUZ 30 on the outside. No visible seams. Nails hidden by piping black 190.

Acoustics evaluated according to SS 25269.

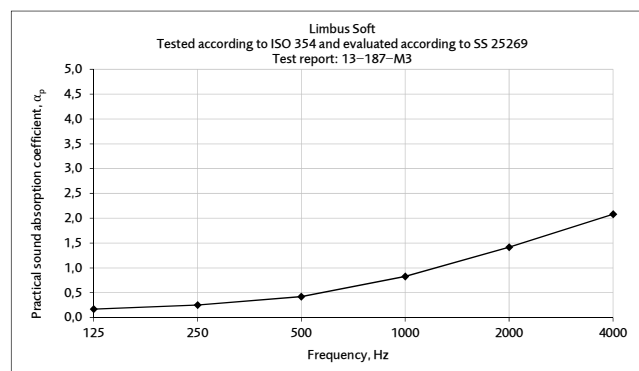

**Equivalent absorption area per m<sup>2</sup> screen surface (m<sup>2</sup>S/m<sup>2</sup>)**

The values are to be multiplied by the screen area.

# Limbus Soft

Floor screen

Design: Team Glimakra

