
Wall panels

Design: Team Glimakra



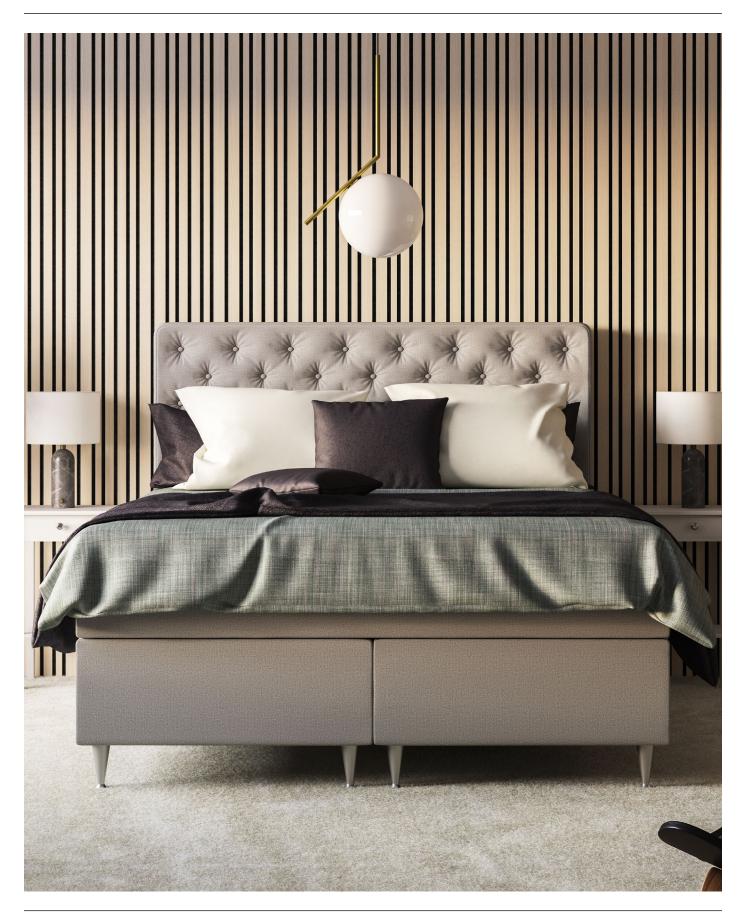

Wall panels

Design: Team Glimakra



Ribbon-Wood Barcode is an acoustic panel consisting of ribs with veneered MDF that sits on an acoustic blanket, Recosilent. A large selection of veneers from our own production, as well as several options among surface treatments, together with black and light gray Recosilent means that the options are many for you to find a rib panel that suits you. In addition to our standard range, we can also solve most things in terms of wood type, size, surface treatment or other adaptations you may be interested in.

#### RIBBON-WOOD BARCODE

Ribbon-Wood Barcode is part of the Wallsystems by Glimakra of Sweden product portfolio. We are a Swedish company with value-driving factors such as Scandinavian acoustic design, greater flexibility and higher quality. Along with these, we create favorable sound landscapes for different types of environments. With broad knowledge and long experience, we develop and manufacture products in our own factory in Glimåkra. We are the largest in Sweden in wood veneer and through an ongoing collaboration with several prominent designers, we are always at the forefront when it comes to acoustic design.

### INFORMATION

Surface layer 0.6mm veneer.
Surface treatment Stained or untreated.

Sheet material 12 mm standard or solid black MDF Acoustic blanket RecoSilent (RS), 9mm recycled PET.

Black or light gray.

Thickness 22 mm

Assembly

Sizes 2400x600mm or 2960x600mm. Can be cut for extra.

Screw (15 pcs / panel) or glued (0.5 / panel)

easily in place.

Manufacturing Glimåkra

### SUSTAINABILITY

The product meets Möbelfakta's requirements for the environment and responsible supply chains.

### PRESCRIPTION TEXT

Ribbon-Wood Barcode, Classic Oak Barcode black RecoSilent, 2400x600mm

### FIRE PROPERTIES

Standard range:

Acoustic felt RecoSilent B-s1,d0

Wooden slats D-s2,d0

FR (FR = Fireclass)

Acoustic felt RecoSilent B-s1,d0
Wooden slats B-s1,d0 or B-s2,d0

Prescription text at FR: Ribbon-Wood, Article name + FR

Ex. Wall system, Classic Oak black RecoSilent, 2400x600mm, FR


#### CERTIFICATE


Ribbon-Wood Barcode is sound tested with original pattern. As Barcode has a slightly more comprehensive pattern, we estimate the acoustic effect to be at least 80% of the corresponding classification A-D with original patterns.


Acoustics SS-EN ISO 354: 2003 evaluated according to SS-EN ISO 11654: 1997. Test report no. 21-755-R1. Date: 2021-12-09 (Acoustics workshop, laboratory accredited by Swedack)

NRC value: (Report 3235-R1, -R2, Date 2023-10-11, Akustikverkstan)

Mounting directly to wallAnnex 3235-M10NRC=0,55Mounting with 45mm air gapAnnex 3235-M11NRC=0,77Mounting with 45mm mineral woolAnnex 3235-M12NRC=1,00

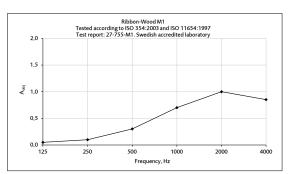

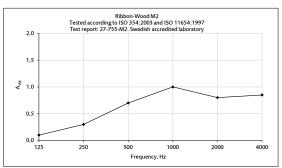

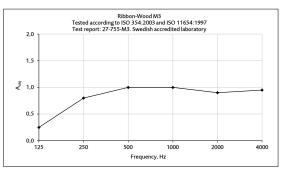

Equivalent absorption area per m<sup>2</sup> screen area (m<sup>2</sup>S / m<sup>2</sup>)


Wall panels


Design: Team Glimakra



### MEASURE

2960 x 605 x 21mm (Construction dimensions)

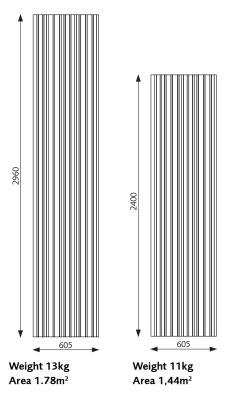

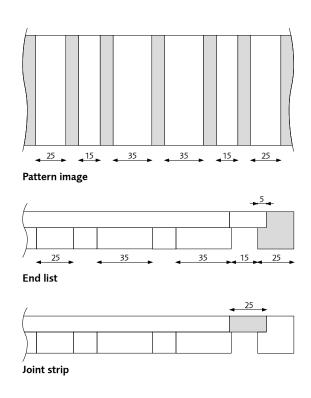

### OUR STANDARD ASSORTMENT



Classic Ash Barcode, RS gray



Classic Ash Barcode, RS black



Classic Oak Barcode, RS gray



Classic Oak Barcode, RS black



Black Diamond Ash Barcode, RS black



Rustic Natural Oak Barcode, RS black



Rustic Grey Oak Barcode, Walnut Barcode, RS black



RS black



End slat



Felt strip

Wall panels

Design: Team Glimakra



### OUR STANDARD ASSORTMENT



Classic Ash Barcode, RS gray



Classic Ash Barcode, RS black



Classic Oak Barcode, RS gray



Classic Oak Barcode, RS black



Black Diamond Ash Barcode, RS black



Rustic Natural Oak Barcode, RS black



Rustic Grey Oak Barcode, Walnut Barcode, RS black



RS black



End slat



Felt strip

### OUR STANDARD ASSORTMENT



Diamond Oak Barcode,



Diamond Oak Barcode, RS grey



Diamond Oak Barcode,



Diamond Ash Barcode, RS black



Diamond Ash Barcode, RS grey



Diamond Ash Barcode, RS White



Diamond Walnut Barcode, End slat RS black





Felt strip

Wall panels

Design: Team Glimakra





